


**TALUS**

CODE	H x W x D	Fuel	BTU	Watts	KCAL	Pipes	Bracket centres V	Bracket centres H
Talus E8-6060	600x390x70	E/H/D	1,885	552	475	350	455	350
Talus E10-6060	600x490x70	E/H/D	2,356	690	593	450	455	450
Talus E12-6060	600x590x70	E/H/D	2,828	828	712	550	455	550
Talus E14-6060	600x690x70	E/H/D	3,299	966	831	650	455	650
Talus E16-6060	600x790x70	E/H/D	3,770	1104	949	750	455	750
Talus E20-6060	600x990x70	E/H/D	4,713	1380	1,187	950	455	950
Talus E24-6060	600x1190x70	E/H/D	5,655	1656	1,424	1150	455	1150
Talus E28-6060	600x1390x70	E/H/D	6,598	1932	1,661	1350	455	650+700
Talus E32-6060	600x1590x70	E/H/D	7,540	2208	1,899	1550	455	750+800
Talus E36-6060	600x1790x70	E/H/D	8,483	2484	2,136	1750	455	850+900
Talus L8-7660	760x390x70	E/H/D	1,988	582	500	240	455	350
Talus L10-7660	760x490x70	E/H/D	2,459	720	619	340	455	450
Talus L12-7660	760x590x70	E/H/D	2,930	858	738	440	455	550
Talus L14-7660	760x690x70	E/H/D	3,401	996	856	540	455	650
Talus L16-7660	760x790x70	E/H/D	3,873	1134	975	640	455	750
Talus L20-7660	760x990x70	E/H/D	4,815	1410	1,212	840	455	950
Talus L24-7660	760x1190x70	E/H/D	5,758	1686	1,450	1040	455	1150
Talus L28-7660	760x1390x70	E/H/D	6,700	1962	1,687	1240	455	1350
Talus L32-7660	760x1590x70	E/H/D	7,643	2238	1,924	1440	455	750+800
Talus L36-7660	760x1790x70	E/H/D	8,585	2514	2,162	1640	455	850+900
Talus LT7-15013	1500x340x60	H	3,719	1089	936	190	1152	300
Talus LT5-18016	1800x240x60	H	3,299	966	831	90	1456	200
Talus LT6-18016	1800x290x60	H	3,927	1150	989	140	1456	250
Talus LT5-20018	2000x340x60	H	3,692	1081	929	190	1656	200

Talus E: wall mounted in horizontal or vertical position.  
 Talus L: wall mounted, floor standing in horizontal position only, with legs  
 Talus LT: wall mounted, floor standing with legs and tower model.1


	Position of tapping	Thermostatic valve. Floor pipes	Thermostatic valve. Wall pipes	Manual valve. Floor pipes	Manual valve. Wall pipes
Talus E. Horizontal Mount (Vertical bars)	Bottom Feed	UDS851 + UDS109L	UDS860 + UDS109L*	UDS851	UDS850
	Side Feed	UDS850 + UDS109L*	UDS860 + UDS109L*	UDS860	UDS860
Talus L (Floor standing + wall mount)	Inside Outer Bars / Legs	UDS850 + UDS109L	UDS860 + UDS109L or	UDS850	UDS850 or
			UDS850 + UDS109L*		UDS860
Talus LT (Floor standing + wall mount)	Inside Outer Bars / Legs	UDS850 + UDS109L	UDS860 + UDS109L or UDS850 + UDS109L*	UDS850	UDS850 or UDS860

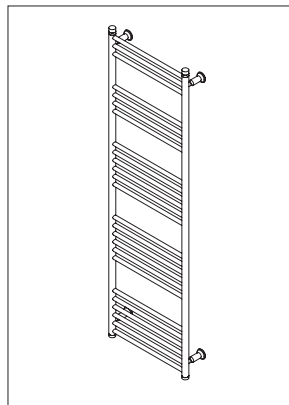

**TORA**

CODE	H x W x D	Fuel	BTU	Watts	KCAL	Pipes	Bracket centres V	Bracket centres H
Tora 47-2	718x400x25	E/H/D	1,153	338	291	375	568	375
Tora 410-3	1044x400x25	E/H/D	1,685	494	425	375	894	375
Tora 415-5	1550x400x25	E/H/D	2,394	702	604	375	1400	375

	Position of tapping	Thermostatic valve. Floor pipes	Thermostatic valve. Wall pipes	Manual valve. Floor pipes	Manual valve. Wall pipes
	Bottom Feed	UDS851 + UDS109L	UDS860 + UDS109L*	UDS851	UDS850

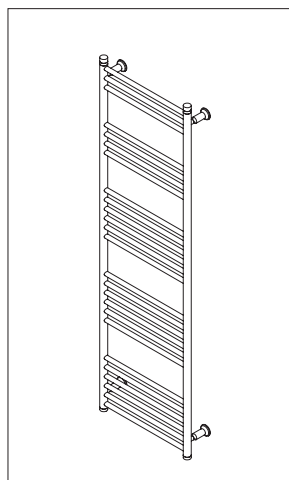

**TOTEM**

European Community Design Registry Number : 000313572-005

CODE	H x W x D	Fuel	BTU	Watts	KCAL	Pipes	Bracket centres V	Bracket centres H
Totem-193	1900x300x300	H	9,979	2922	2,512	200	250	250
Totem-134	1320x400x400	H	7,178	2102	1,807	300	350	350

	Position of tapping	Thermostatic valve. Floor pipes	Thermostatic valve. Wall pipes	Manual valve. Floor pipes	Manual valve. Wall pipes
	Both Feeds on One Side	UDS850 + UDS109L	UDS851 + UDS109L	UDS850	UDS851
	Side Feed Using SPF	ANY VALVE			