


### ZENITH

UK Patent Office Design Registry Number : 3019931

CODE	H x W x D	Fuel	BTU	Watts	KCAL	Pipes	Bracket centres V	Bracket centres H
Zenith 64	560x380x40	E/H/D	501	147	126	340	420	340
Zenith 105	1000x480x40	E/H/D	1,016	298	256	440	860	440
Position of tapping		Thermostatic valve. Floor pipes	Thermostatic valve. Wall pipes		Manual valve. Floor pipes		Manual valve. Wall pipes	
Bottom Feed		UDS851 + UDS109L	UDS850 + UDS109L* or UDS860 + UDS109L		UDS851		UDS850 or UDS860	

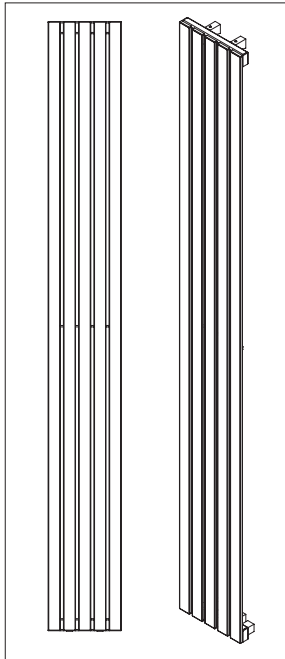

### ZEPHYR

ZEPHYR 2005-2: European Community Design Registry Number : 000313572-002 UK Patent Office Design Registry Number : 3020561  
 ZEPHYR 2005: European Community Design Registry Number : 000313572-006 UK Patent Office Design Registry Number : 3019929  
 ZEPHYR 2007T: UK Patent Office Design Registry Number : 3019931

CODE	H x W x D	Fuel	BTU	Watts	KCAL	Pipes	Bracket centres V	Bracket centres H
Zephyr 2005	2000x240x40	H	2,646	776	667	200	1960	100
Zephyr 2007	2000x340x40	H	3,705	1086	934	300	1960	200
Zephyr 2007T	2000x320x40	H	3,683	1080	929	280	1960	220
Zephyr 2010	2000x490x40	H	5,292	1552	1,334	450	1960	350
Zephyr 2012	2000x590x40	H	6,349	1862	1,601	550	1960	450
Zephyr 1805	1800x240x40	H	2,380	698	600	200	1760	100
Zephyr 1807	1800x340x40	H	3,332	977	840	300	1760	200
Zephyr 1810	1800x490x40	H	4,760	1396	1,200	450	1760	350
Zephyr 1812	1800x590x40	H	5,712	1675	1,440	550	1760	450
Zephyr 1505	1500x240x40	H	1,985	582	500	200	1460	100
Zephyr 1507	1500x340x40	H	2,779	815	701	300	1460	200
Zephyr 1510	1500x490x40	H	3,969	1164	1,001	450	1460	350
Zephyr 1515	1500x740x40	H	5,954	1746	1,501	700	1460	600
Zephyr 1520	1500x990x40	H	7,938	2328	2,002	950	1460	850
Infinity Mirror 2036	2000x360x50		220-240volts					
Infinity Mirror 1836	1800x360x50		220-240volts					
ZTB 5	40x240		Towel Bar for 5 section wide Zephyr					
ZTB 7	40x340		Towel Bar for 7 section wide Zephyr					
ZTB10	40x490		Towel Bar for 10 section wide Zephyr					

	Position of tapping	Thermostatic valve. Floor pipes	Thermostatic valve. Wall pipes	Manual valve. Floor pipes	Manual valve. Wall pipes
Zephyr. Vertical Mount	Back Feed	UDS850 + UDS109L	UDS850 + UDS109L	UDS850	UDS850
	Back Feed using 90MF	UDS851 + UDS109L	UDS850 + UDS109L*	UDS851	UDS850
Zephyr. Horizontal Mount	Back Feed	UDS850 + UDS109L	UDS850 + UDS109L	UDS850	UDS850
	Back Feed using 90MF	UDS851 + UDS109L	UDS850 + UDS109L*	UDS851	UDS850

## VALVES, ELEMENTS & ACCESSORIES

- UDS 850** Set of Flow & Return ANGLE valve finished in brushed mat finish matching Aeon Range with pair of 15mm connectors. (For mirror chrome finish specify **UDC 850**)
- UDS 851** Set of Flow & Return STRAIGHT valve finished in brushed mat finish matching Aeon Range with pair of 15mm connectors. (For mirror chrome finish specify **UDC 851**)
- UDS 860** Set of Flow & Return SWIVEL valve finished in brushed mat finish matching Aeon Range with pair of 15mm connectors. (For mirror chrome finish specify **UDC 860**)
- UDS 927** INTERAXIAL SWIVEL valve 50mm c-to-c brushed mat finish matching Aeon Range with pair of 15mm connectors and sensor UDSL109L. (For mirror chrome finish specify **UDC 109L**)
- UDS 109L** Domignon Liquid sensor in brushed mat finish matching Aeon Range
- \* The valve head sticks out - coming out ahead of the front of the radiator

Suffix "P" for polished accessories		HE90	90W Heating element. 70C thermostat, 127C thermal fuse, 1,5m cable, 205mm rod
HTL20 Heat transfer liquid for upto 2000mm of height and for all Aeon Products		HE150	150W Heating element. 70C thermostat, 127C thermal fuse, 1,5m cable, 300mm rod
90MF 1/2" BSP male to female stainless steel square elbow		HE300	300W Heating element. 70C thermostat, 127C thermal fuse, 1,5m cable, 450mm rod
180MF 1/2" BSP male to female stainless steel straight		HE400	400W Heating element. 70C thermostat, 127C thermal fuse, 1,5m cable, 550mm rod
SPF 1/2" BSP Straight Male Push Fit to 15mm tube		HE600	600W Heating element. 70C thermostat, 127C thermal fuse, 1,5m cable, 760mm rod
P925 STRAIGHT "H" valve without by-pass (for 50mm c-to-c valve connection)		HE900	900W Heating element. 70C thermostat, 127C thermal fuse, 1,5m cable, 1050mm rod
P926 ANGLE "H" valve without by-pass (for 50mm c-to-c valve connection)		HE300d	300W DRY Heating element kit. 70C thermostat, 127C thermal fuse, 1,5m cable, 650mm rod
P915 STRAIGHT "H" valve with by-pass (for 50mm c-to-c valve connection)		HE400d	400W DRY Heating element. kit 70C thermostat, 127C thermal fuse, 1,5m cable, 850mm rod
P916 ANGLE "H" valve with by-pass (for 50mm c-to-c valve connection)		POS400C	400W Poseidon-CHROME H. Element. 70C t.stat, 127C therm fuse, 1,5m cable, 550mm rod
D13G Danfoss Thermostatic insert with presetting		POS600C	600W Poseidon-CHROME H. Element. 70C t.stat, 127C therm fuse, 1,5m cable, 760mm rod
DRAS-C Danfoss Liquid Sensor		AQ300C	300W Aquarius CHROME Htg. Element. 70C Therm, 127C therm fuse, 1,5m cable, 450mm rod
H9260 Herz Liquid Sensor - Porsche		AQ600C	600W Aquarius CHROME Htg Element. 70C Therm, 127C therm fuse, 1,5m cable, 760mm rod
H7760 Herz Liquid Sensor - Normal		AES400C	400W Aeon POLISHED STAINLESS STEEL Dimhead Heating Element - Straight type
P3625N 15mm Copper Tube Connector - PAIR		AES400S	400W Aeon BRUSHED MATT STAINLESS STEEL Dimhead Heating Element - Straight type
P99SP DRAIN DEVICE		AES600C	600W Aeon POLISHED STAINLESS STEEL Dimhead Heating Element - Straight type
SJAC Designer 1/2"BSP airvet with "O" ring in mirror chrome plated		AES600S	600W Aeon BRUSHED MATT STAINLESS STEEL Dimhead Heating Element - straight type
SJPC Designer 1/2"BSP plug with "O" ring in mirror chrome plated		AEA400C	400W Aeon POLISHED STAINLESS STEEL Dimhead Heating Element - Angle type
ASJA Automatic 1/2" BSP airvent with "O" ring		AEA400S	400W Aeon BRUSHED MATT STAINLESS STEEL Dimhead Heating Element - Angle type
		AEA600C	600W Aeon POLISHED STAINLESS STEEL Dimhead Heating Element - Angle type
		AEA600S	600W Aeon BRUSHED MATT STAINLESS STEEL Dimhead Heating Element - Angle type
		TPC	"T" piece in mirror chrome plated finish for dual fuel operation
		TPS	"T" piece in brushed matt plated finish for dual fuel operation
		4w-TRV+	4 way thermostatic radiator valve (white sensor and nickel plated body) for dual fuel operation
		P3625N	PAIR of 15mm copper tube connector in nickel plated finish

Fuel E : Electric H : Hot water D : Dual fuel All dimensions in Millimeters